

Type 035113

Type 035135

Armaturen für Schiffbau und Industrie
Valves for shipbuilding and industry



Verschraubungs-Eckventile, PN 40
DIN 86511, Form DS-RG-N
aus Rotguss / Messing
metallisch dichtend, mit Kopfstücksicherung
Eintritt: Aussengewinde nach ISO 228/1
Austritt: mit Lötverschraubung
(Alternativ mit Schweissverschraubung möglich)


Materialspezifikation:

Gehäuse: CuSn5Zn5Pb5-C CC491K
Oberteil: CuZn39Pb2 CW612N
Kegel: CuZn35Ni3Mn2AlPb CW710R
Spindel: CuZn35Ni3Mn2AlPb CW710R

angle globe valve with soldering union, PN 40
DIN 86511, Form DS-RG-N
bronze / brass
metal seat, with secured bonnet
inlet: male thread acc. to ISO 228/1
outlet: soldering union
(alternative possible with welding union)

material specification:

body: CuSn5Zn5Pb5-C CC491K
bonnet: CuZn39Pb2 CW612N
disc: CuZn35Ni3Mn2AlPb CW710R
Stem: CuZn35Ni3Mn2AlPb CW710R

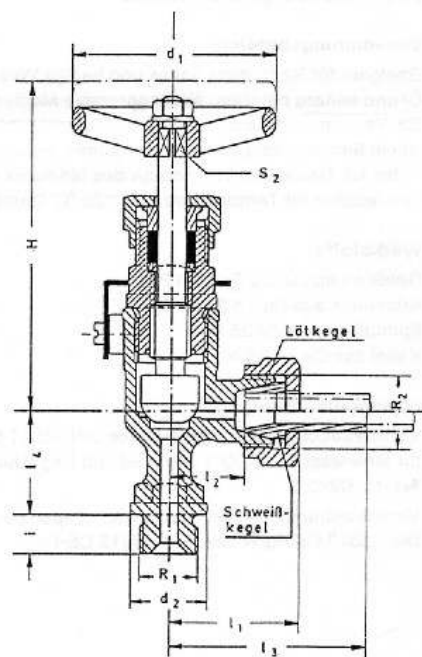

Type 035113

Type 035113: Absperrventil DIN 86511, Form DS-RG-N
globe valve DIN 86511, form DS-RG-N

Type 035135: Absperrbares Rückschlagventil DIN 86512, Form DRS-RG-N
screw-down-non-return globe valve DIN 86512, Form DRS-RG-N

ebenfalls lieferbar / also available:

Ventile DIN 86511/86512 mit Spindel und Kegel aus CuSn8 (Form RG-S)
valves DIN 86511/86512 with disc and stem in CuSn8 (form RG-S)

NW/DN	R1	i	l1	l2	l3	l4	H	d1	S2	R2	KG
06 x 10	3/8"	12	37	21	58	30	92	63	7	1/2"	0,5
08 x 12	1/2"	14	39	23	62	32	92	63	7	5/8"	0,5
10 x 14	1/2"	14	44	25	69	35	92	63	7	3/4"	0,6
12 x 16	3/4"	16	47	28	74	38	103	70	8	7/8"	0,9
16 x 20	3/4"	16	50	30	78	40	103	70	8	1"	0,9
20 x 25	1"	18	59	38	89	48	120	100	9	1 1/8"	1,4
25 x 30	1 1/4"	20	62	39	93	50	120	100	9	1 3/8"	1,6
32 x 38	1 1/2"	22	68	44	100	55	138	110	11	1 3/4"	2,2